

TRAILMASTER®

Infrared Trail Monitors


TM Multi-Camera Trigger II™

Can be used with TM1550/TM1500, TM550/TM500, and TM Intervalometer

The TM Multi-Camera Trigger II is used when one TrailMaster monitor needs to simultaneously activate multiple cameras on a photo event. One, two or three cameras can be controlled by each box. Boxes may be daisy-chained if more than three cameras are necessary. This will make it possible to photograph an animal from more than one angle at one time.




- Includes:
- (1) Multi-Camera Trigger II Box
 - (1) 25' TM25MC Connecting Cable

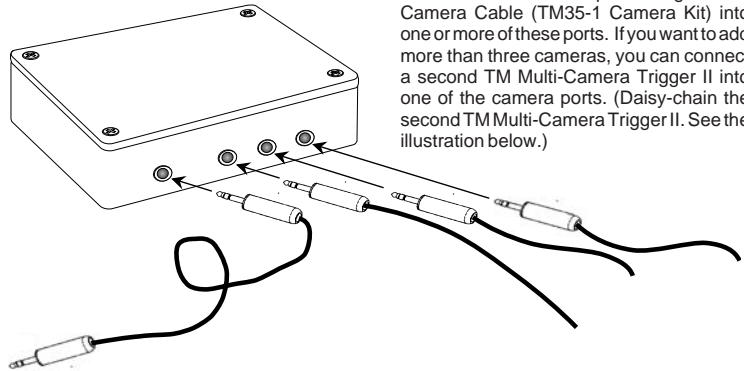

There are three camera ports. Plug a TM25 Camera Cable (TM35-1 Camera Kit) into one or more of these ports. If you want to add more than three cameras, you can connect a second TM Multi-Camera Trigger II into one of the camera ports. (Daisy-chain the second TM Multi-Camera Trigger II. See the illustration below.)

The 25' TM25MC Connecting Cable connects the TM Multi-Camera Trigger II and TRAILMASTER Monitor. (TM1550, TM1500, TM550, TM500, or TM Intervalometer)

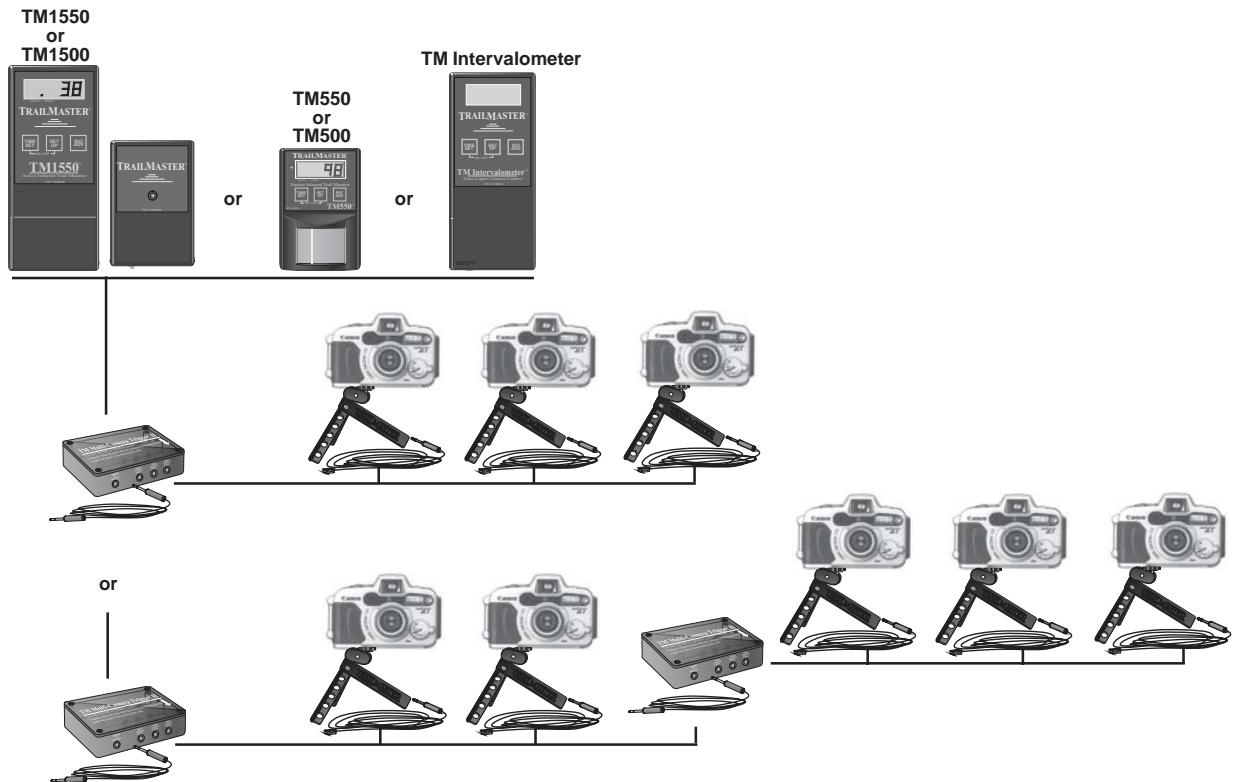

FOR A FREE CATALOG or
ORDER 1-800-544-5415

TRAILMASTER Infrared Trail Monitors • 10614 Widmer • Lenexa, KS 66215 • TEL 913-345-8555 • FAX 913-345-8272 • sales@trailmaster.com